

Features

- Interdigitated amplifying gates
- Fast turn-on and high di/dt
- Low switching losses

Typical Applications

- Inductive heating
- Electronic welders
- Self-commutated inverters

$I_{T(AV)}$	490A
V_{DRM}/V_{RRM}	800~1600V
t_q	18~50μs
I_{TSM}	4.3 kA
I^2t	92 10³A²S



SYMBOL	CHARACTERISTIC	TEST CONDITIONS	T _J (°C)	VALUE			UNIT
				Min	Type	Max	
I _{T(AV)}	Mean on-state current	180° half sine wave 50Hz Double side cooled,	125			490	A
						330	
V _{DRM} V _{RRM}	Repetitive peak off-state voltage Repetitive peak reverse voltage	V _{DRM} &V _{RRM} , tp=10ms V _D &V _{RSM} = V _{DRM} &V _{RRM} +100V	125	800		1600	V
I _{DRM} I _{RRM}	Repetitive peak current	V _D = V _{DRM} V _R = V _{RRM}	125			30	mA
I _{TSM}	Surge on-state current	10ms half sine wave	125			4.3	kA
I ² t	I ² T for fusing coordination	V _R =0.6V _{RRM}				92	A ² s*10 ³
V _{TO}	Threshold voltage		125			1.60	V
r _T	On-state slop resistance					1.32	mΩ
V _{TM}	Peak on-state voltage	I _{TM} =1000A, F=7.0kN	125			2.92	V
dv/dt	Critical rate of rise of off-state voltage	V _{DM} =0.67V _{DRM}	125			500	V/μs
di/dt	Critical rate of rise of on-state current	V _{DM} = 67%V _{DRM} to 800A, Gate pulse t _r ≤0.5μs I _{GM} =1.5A f=1Hz	125			1200	A/μs
Q _{rr}	Recovery charge	I _{TM} =1000A, tp=2000μs, di/dt=-60A/μs, V _R =50V	125		350		μC
t _q	Circuit commutated turn-off time	I _{TM} =500A, tp=1000μs, V _R =50V dv/dt=30V/μs , di/dt=-20A/μs	125	18		50	μs
I _{GT}	Gate trigger current	V _A =12V, I _A =1A	25	40		250	mA
V _{GT}	Gate trigger voltage			0.9		2.5	V
I _H	Holding current			20		400	mA
V _{GD}	Non-trigger gate voltage	V _{DM} =67%V _{DRM}	125	0.3			V
R _{th(j-c)}	Thermal resistance Junction to case	At 180° sine double side cooled Clamping force 7.0kN				0.045	°C /W
R _{th(c-h)}	Thermal resistance case to heat sink					0.010	
F _m	Mounting force			5.3		10	kN
T _{slg}	Stored temperature			-40		140	°C
W _t	Weight				80		g
Outline	KT25aT						

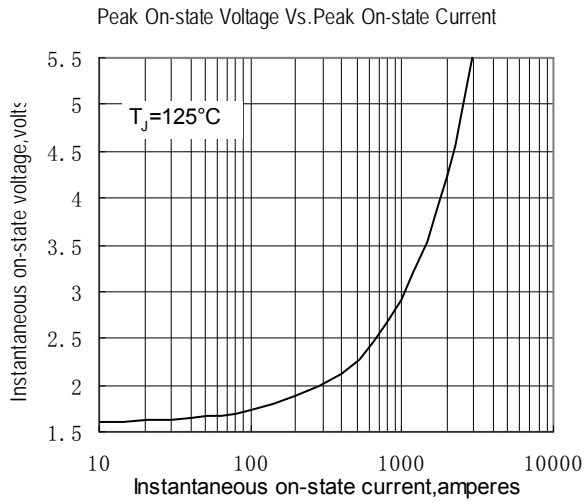


Fig.1

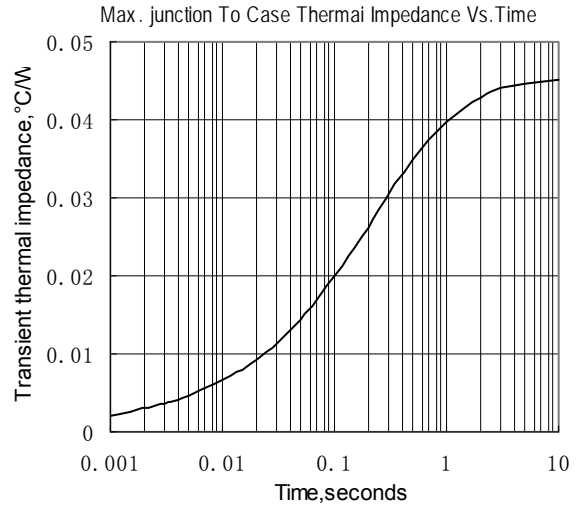


Fig.2

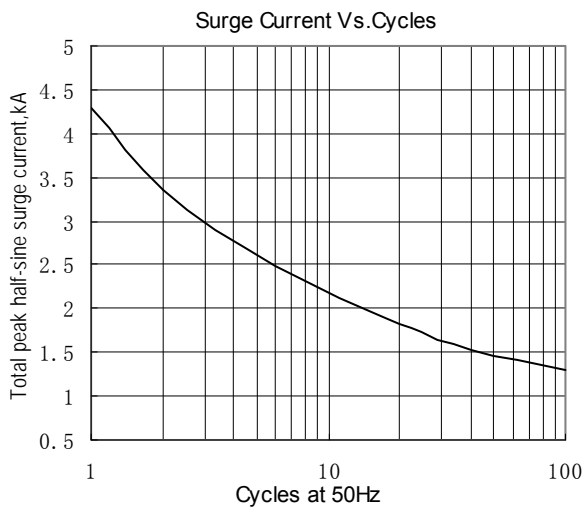


Fig.3

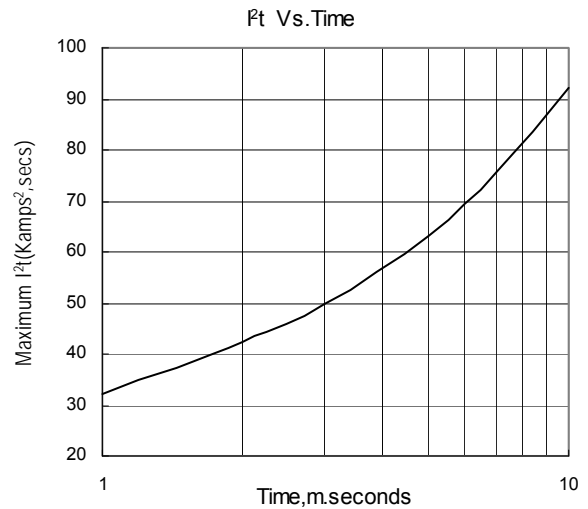


Fig.4

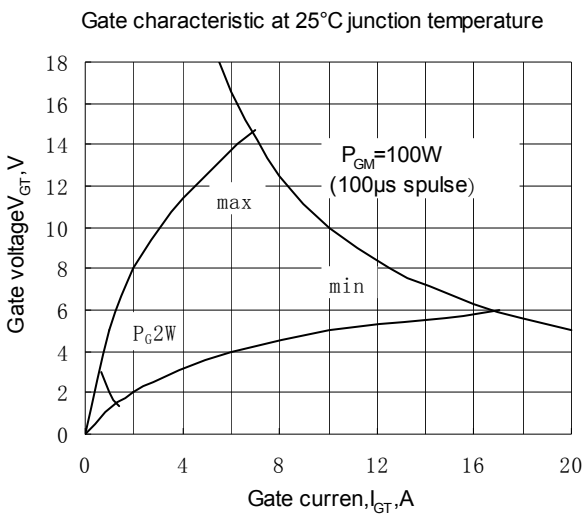


Fig.5

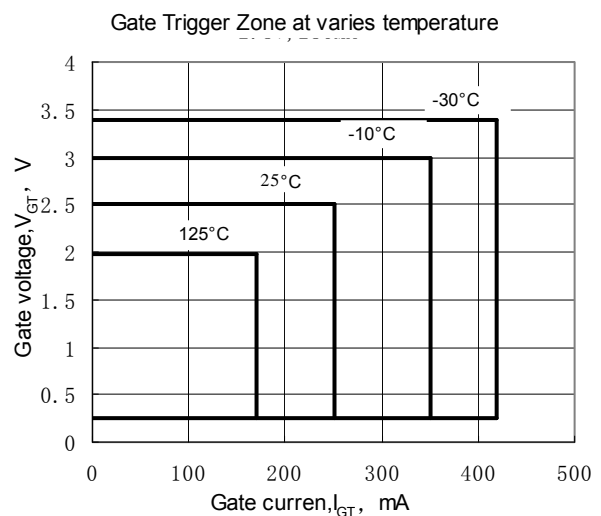


Fig.6

Outline:

