

Features:

- Isolated mounting base 3000V~
- Pressure contact technology with
Increased power cycling capability
- Space and weight savings

Typical Applications

- AC/DC Motor drives
- Various rectifiers
- DC supply for PWM inverter

$I_{F(AV)}$	110A
V_{RRM}	1900~2500V
I_{FSM}	2.60 A×10 ³
I^2t	33 A ² S×10 ³



SYMBOL	CHARACTERISTIC	TEST CONDITIONS	T _J (°C)	VALUE			UNIT
				Min	Type	Max	
$I_{F(AV)}$	Mean forward current	180° half sine wave 50Hz Single side cooled, T _C =100°C	150			110	A
$I_{F(RMS)}$	RMS forward current		150			173	A
V_{RRM}	Repetitive peak reverse voltage	V _{RRM} tp=10ms V _{RSM} = V _{RRM} +100V	150	1900		2500	V
I_{RRM}	Repetitive peak current	at V _{RRM}	150			12	mA
I_{FSM}	Surge forward current	10ms half sine wave	150			2.60	KA
I^2t	I ² T for fusing coordination	V _R =0.6V _{RRM}				33	A ² S×10 ³
V_{FO}	Threshold voltage		150			0.85	V
r_F	Forward slop resistance					1.88	mΩ
V_{FM}	Peak forward voltage	I _{FM} =330A	25			1.55	V
$R_{th(j-c)}$	Thermal resistance Junction to case	At 180° sine: Single side cooled				0.33	°C/W
$R_{th(c-h)}$	Thermal resistance case to heatsink	At 180° sine: Single side cooled				0.20	°C/W
V_{iso}	Isolation voltage	50Hz, R.M.S, t=1min, I _{iso} : 1mA(max)		3000			V
F_m	Terminal connection torque(M5)				4		N·m
	Mounting torque(M6)				6		N·m
T_{stg}	Stored temperature			-40		125	°C
W_t	Weight				170		g
Outline	223F3/217F3						

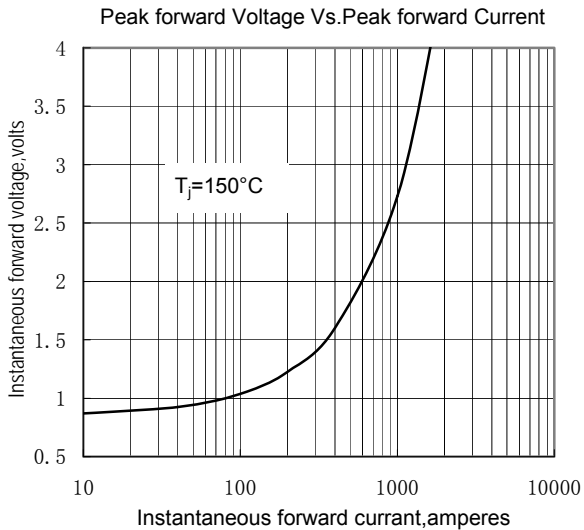


Fig.1

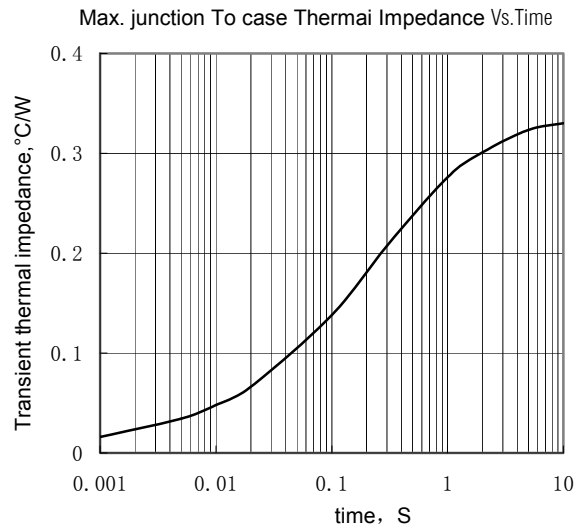


Fig.2

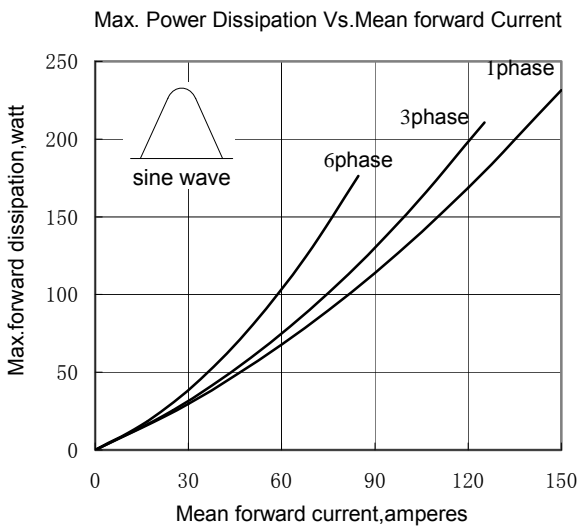


Fig.3

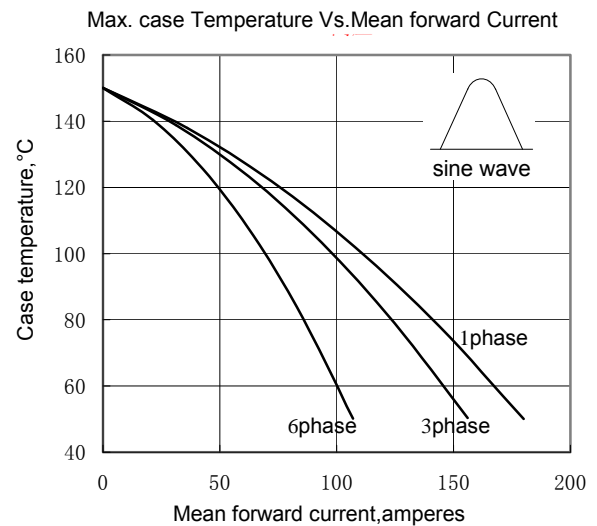


Fig.4

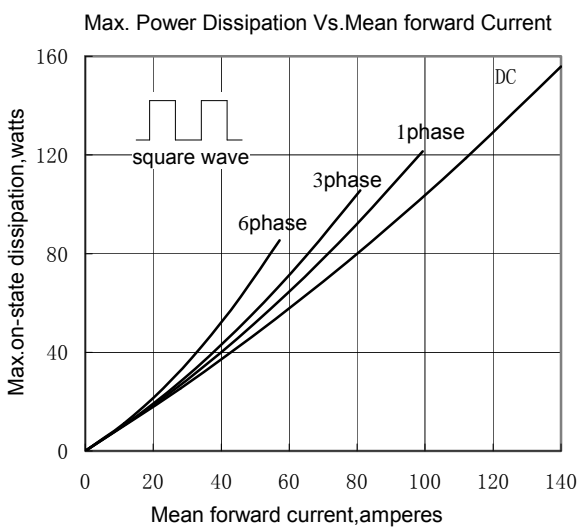


Fig.5

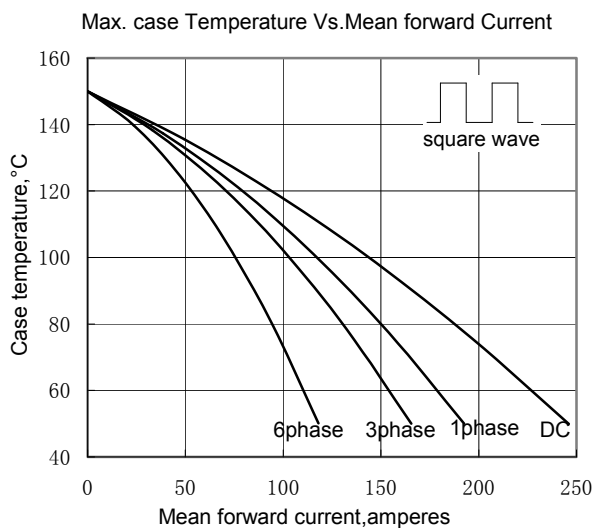


Fig.6

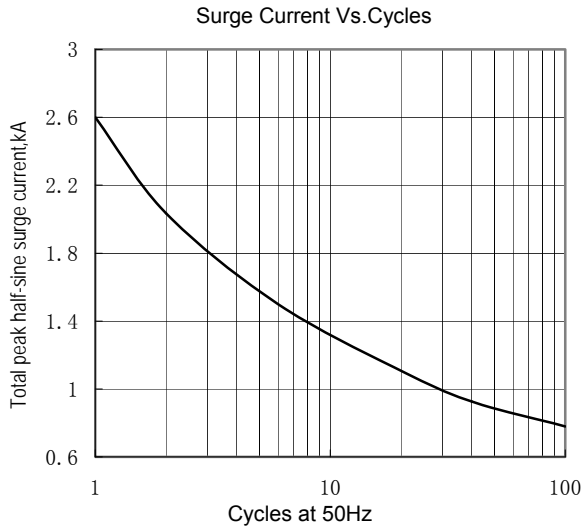


Fig.7


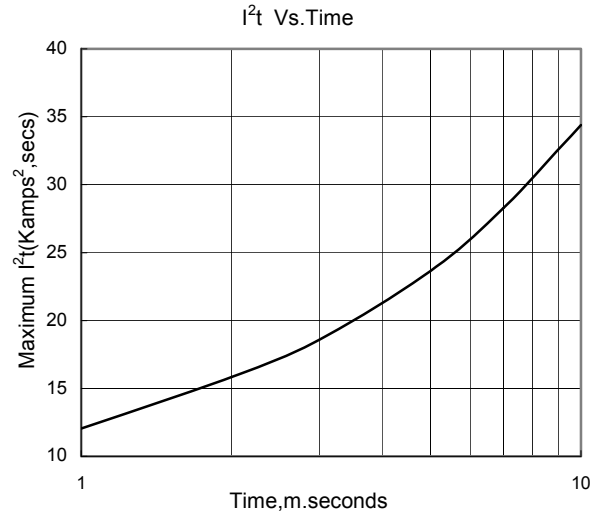


Fig.8

Outline:



223F3

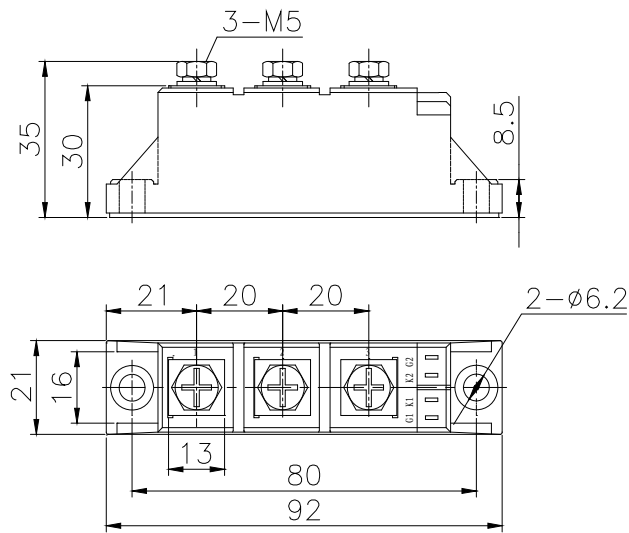