

Features:

- Isolated mounting base 3600V~
- Pressure contact technology with Increased power cycling capability
- Space and weight savings

Typical Applications

- AC/DC Motor drives
- Various rectifiers
- DC supply for PWM inverter

$I_{T(AV)}$ **500A**
 V_{DRM}/V_{RRM} **2600~3600V**
 I_{TSM} **$14.5A \times 10^3$**
 I^2t **$1051A^2 S \times 10^3$**



| SYMBOL | CHARACTERISTIC | TEST CONDITIONS | T _J (°C) | VALUE | | | UNIT |
|--------------------------------------|--|---|---------------------|-------|------|-------|-------|
| | | | | Min | Type | Max | |
| I _{T(AV)} | Mean on-state current | 180° half sine wave 50Hz Single side water cooled, T _c =55°C | 125 | | | 500 | A |
| I _{T(RMS)} | RMS on-state current | | 125 | | | 785 | A |
| V _{DRM} V _{RRM} | Repetitive peak off-state voltage Repetitive peak reverse voltage | V _{DRM} &V _{RRM} tp=10ms V _{DSM} &V _{RSM} = V _{DRM} &V _{RRM} +100V respectively | 125 | 2600 | | 3600 | V |
| I _{DRM} I _{RRM} | Repetitive peak current | at V _{DRM} at V _{RRM} | 125 | | | 50 | mA |
| I _{TSM} | Surge on-state current | 10ms half sine wave | 125 | | | 14.5 | KA |
| I ² t | I ² T for fusing coordination | V _R =60%V _{RRM} | | | | | 1051 |
| V _{TO} | Threshold voltage | | 125 | | | 1.09 | V |
| r _T | On-state slop resistance | | | | | | 1.19 |
| V _{TM} | Peak on-state voltage | I _{TM} =1500A | 25 | | | 2.95 | V |
| dv/dt | Critical rate of rise of off-state voltage | V _{DM} =67%V _{DRM} | 125 | | | 800 | V/μs |
| di/dt | Critical rate of rise of on-state current | Gate source 1.5A t _r ≤0.5μs Repetitive | 125 | | | 100 | A/μs |
| I _{GT} | Gate trigger current | V _A =12V, I _A =1A | 25 | 30 | | 200 | mA |
| V _{GT} | Gate trigger voltage | | | 1.0 | | 3.0 | V |
| I _H | Holding current | | | 20 | | 200 | mA |
| V _{GD} | Non-trigger gate voltage | V _{DM} =67%V _{DRM} | 125 | 0.2 | | | V |
| R _{th(j-c)} | Thermal resistance Junction to case | Single side cooled | | | | 0.054 | °C /W |
| R _{th(c-h)} | Thermal resistance case to heat sink | Single side cooled | | | | 0.024 | °C /W |
| V _{iso} | Isolation voltage | 50Hz, R.M.S, t=1min, I _{iso} :1mA(MAX) | | 3600 | | | V |
| F _m | Thermal connection torque(M10) | | | | 12 | | N·m |
| | Mounting torque(M6) | | | | 6.0 | | N·m |
| T _{stg} | Stored temperature | | | -40 | | 125 | °C |
| W _t | Weight | | | | 2600 | | g |
| Outline | 409F3 | | | | | | |

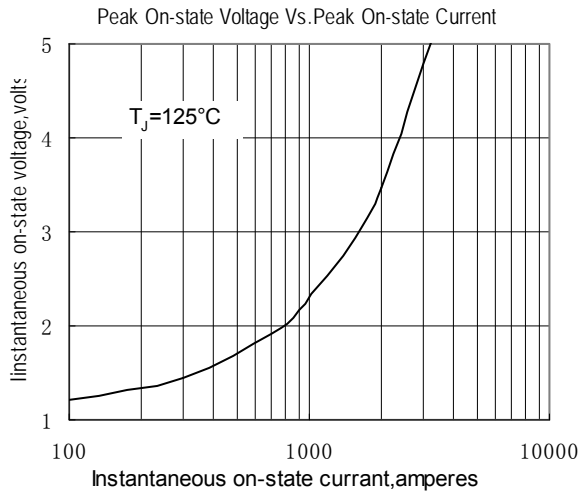


Fig.1

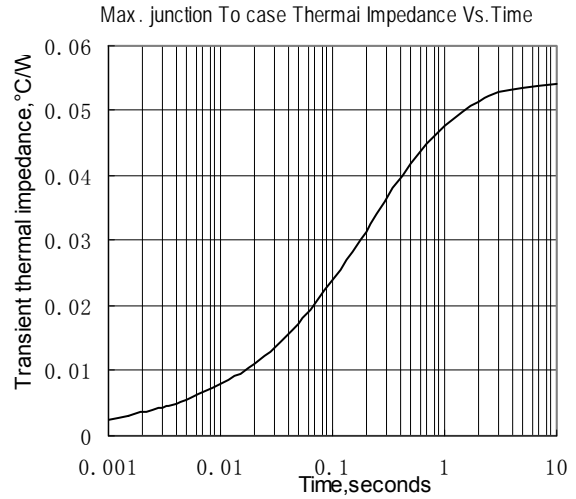


Fig.2

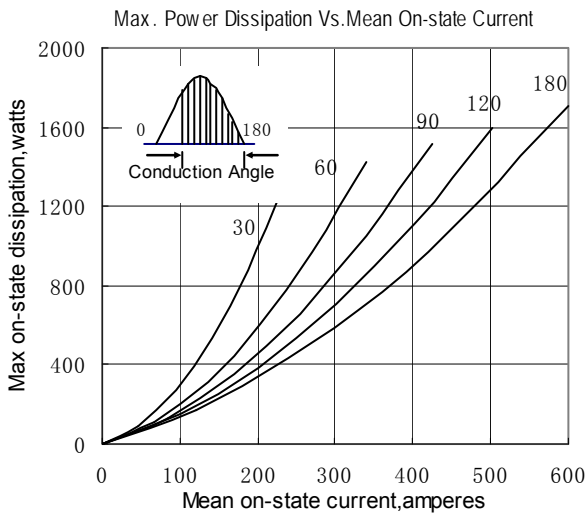


Fig.3

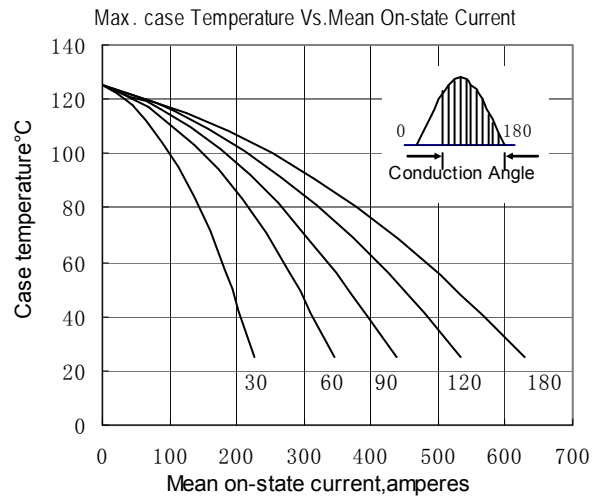


Fig.4

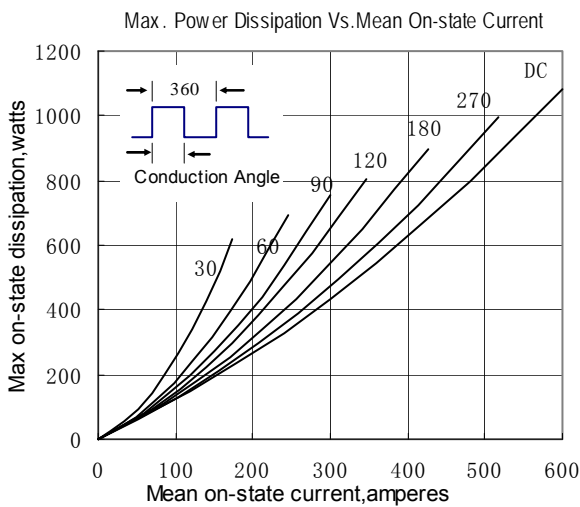


Fig.5

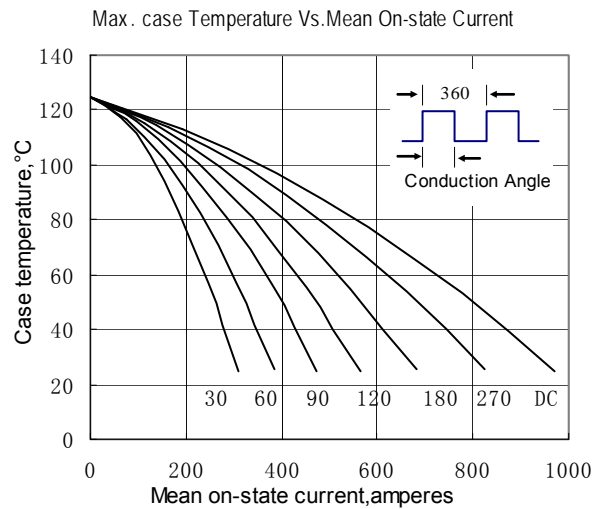


Fig.6

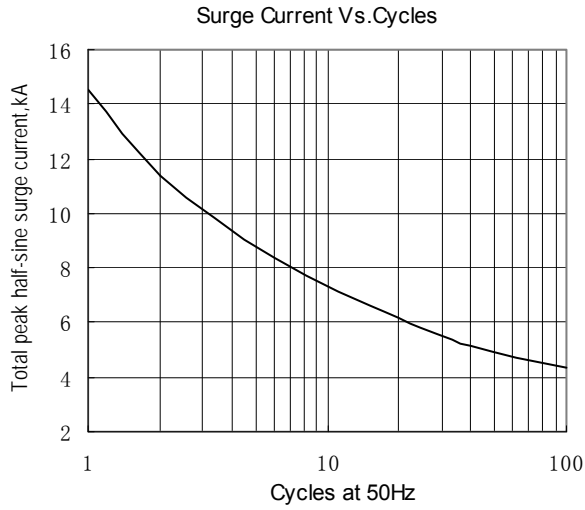


Fig.7

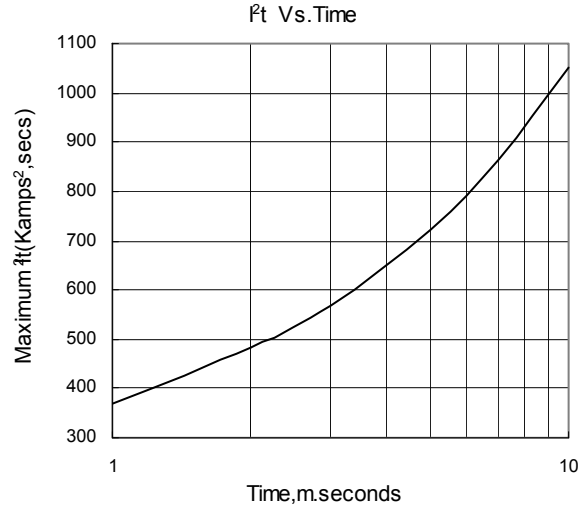


Fig.8

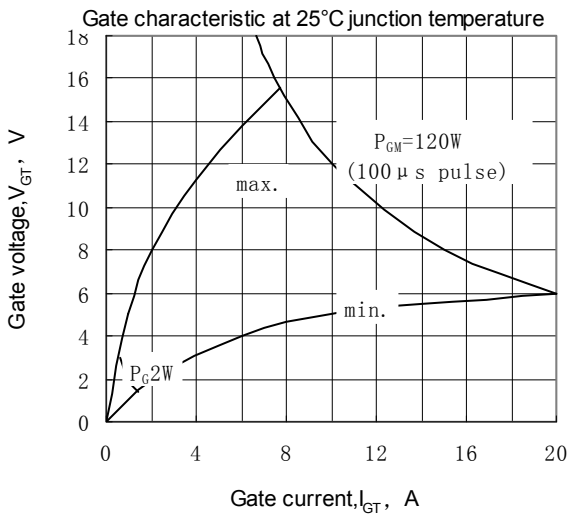


Fig.9


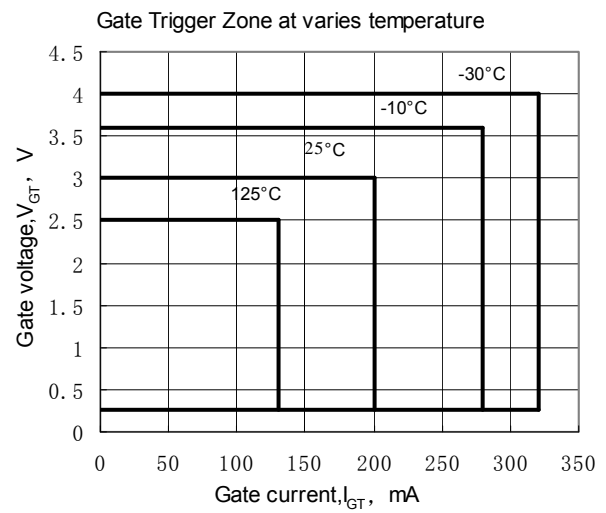


Fig.10

Outline:



409F3

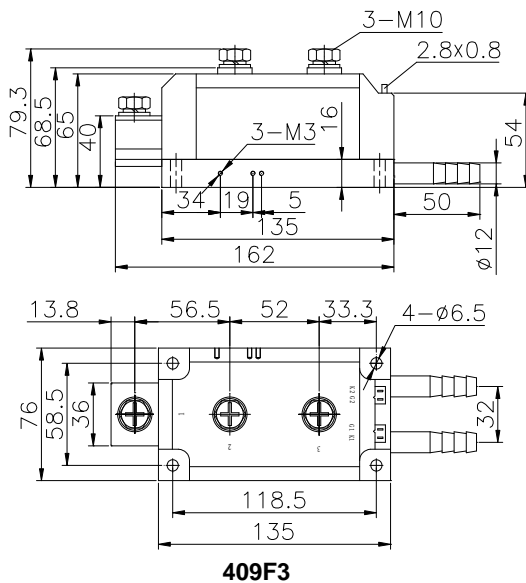