


Features

- Low forward voltage drop
- High reverse voltage
- Hermetic metal cases with ceramic insulators

Typical Applications

- All purpose high power rectifier diodes
- High power resistance welding equipment
- Non-controllable and half-controllable rectifiers
- Controlled rectifiers

$I_{F(AV)}$ **990A**
 V_{RRM} **1100~2000V**
 I_{FSM} **5.6 kA**
 I^2t **157 10³A²S**

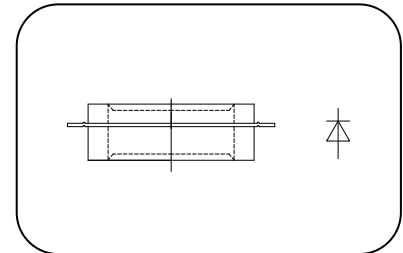

SYMBOL	CHARACTERISTIC	TEST CONDITIONS	T _j (°C)	VALUE			UNIT
				Min	Type	Max	
I _{F(AV)}	Mean forward current	180° half sine wave 50Hz Double side cooled,	T _C =55°C			1280	A
			T _C =85°C			990	
V _{RRM}	Repetitive peak reverse voltage	V _{RRM} tp=10ms V _{RSM} = V _{RRM} +100V	150	1100		2000	V
I _{RRM}	Repetitive peak current	V _{RM} = V _{RRM}	150			40	mA
I _{FSM}	Surge forward current	10ms half sine wave	150			5.6	kA
I ² t	I ² T for fusing coordination	V _R =0.6V _{RRM}				157	A ² s*10 ³
V _{FO}	Threshold voltage		150			1.1	V
r _F	Forward slop resistance					0.32	mΩ
V _{FM}	Peak on-state voltage	I _{FM} =1200A, F=15.0kN	25			1.8	V
Q _{rr}	Recovery charge	I _{FM} =1000A, tp=2000μs, di/dt=-20A/μs, V _R =50V	150		1400		μC
R _{th(j-c)}	Thermal resistance Junction to case	At 180° sine double side cooled Clamping force 15.0kN				0.035	°C /W
R _{th(c-h)}	Thermal resistance case to heat sink					0.010	
F _m	Mounting force			10		20	kN
T _{stg}	Stored temperature			-40		160	°C
W _i	Weight				110		g
Outline	KA32						

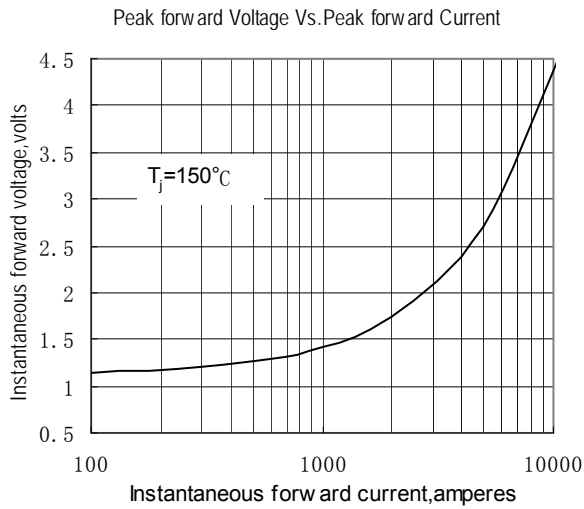


Fig.1

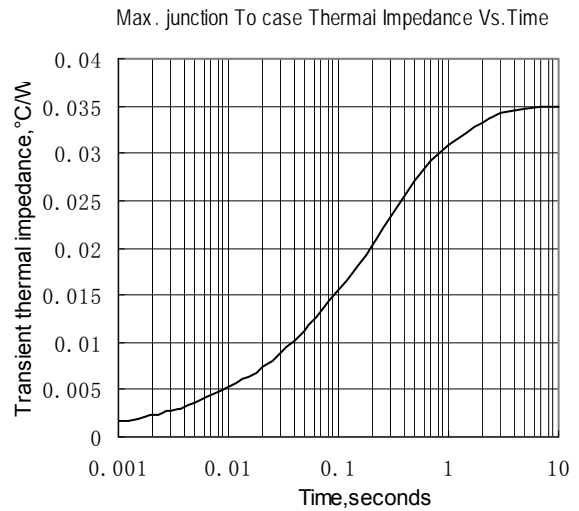


Fig.2

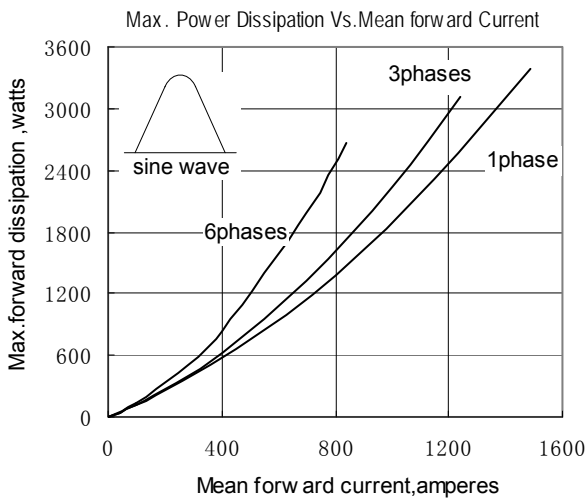


Fig.3

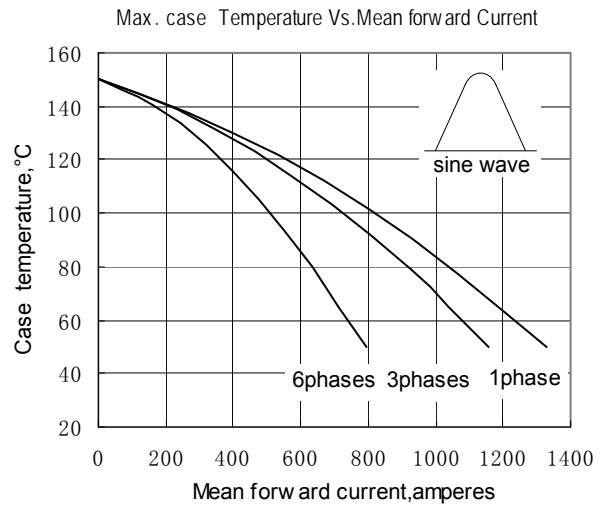


Fig.4

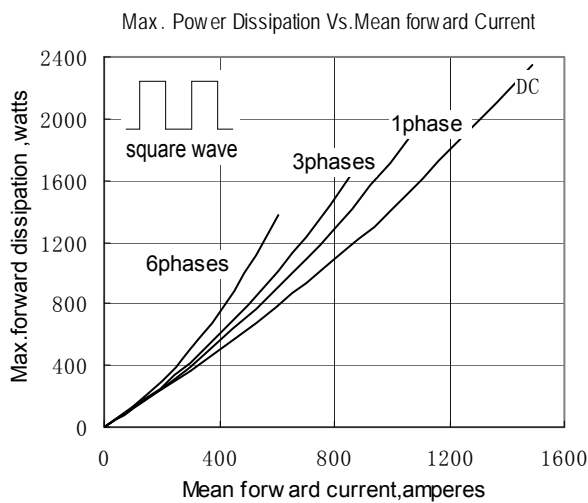


Fig.5

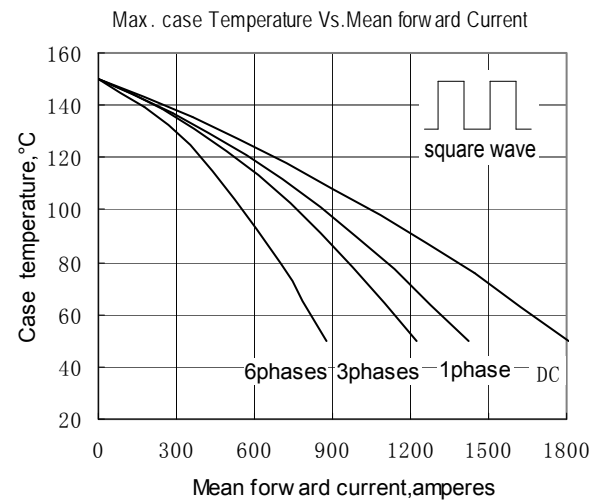


Fig.6

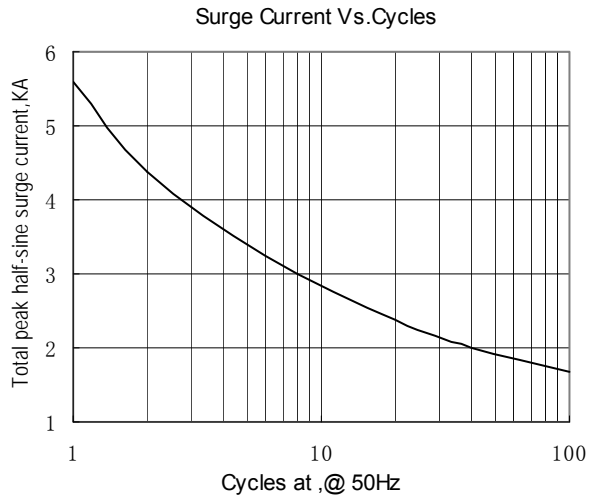


Fig.7

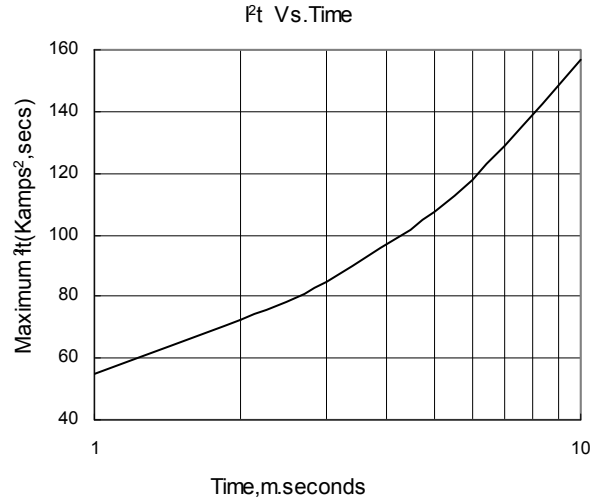


Fig.8

Outline:

