

Features

- Low forward voltage drop
- High reverse voltage
- Hermetic metal cases with ceramic insulators

Typical Applications

- All purpose high power rectifier diodes
- High power resistance welding equipment
- Non-controllable and half-controllable rectifiers
- Controlled rectifiers

$I_{F(AV)}$	1700 A
V_{RRM}	200~1000 V
I_{FSM}	18 KA
I^2t	1620 10³A²S



SYMBOL	CHARACTERISTIC	TEST CONDITIONS		T _j (°C)	VALUE			UNIT
					Min	Type	Max	
$I_{F(AV)}$	Mean forward current	180° half sine wave 50Hz Double side cooled,	T _c =85°C	190			1700	A
V_{RRM}	Repetitive peak reverse voltage	tp=10ms		190	200		1000	V
I_{RRM}	Repetitive peak current	at V _{RRM}		190			40	mA
I_{FSM}	Surge forward current	10ms half sine wave		190			18	kA
I^2t	I ² t for fusing coordination	V _R =0.6V _{RRM}					1620	A ² s*10 ³
V_{FO}	Threshold voltage			190			0.81	V
r_F	Forward slope resistance						0.23	mΩ
V_{FM}	Peak forward voltage	I _{FM} =2400A, F=15kN		25			2.0	V
Q_{rr}	Recovery charge	I _{FM} =2000A, tp=2000μs, di/dt=-20A/μs, V _R =50V		190		1900		μC
$R_{th(j-c)}$	Thermal resistance Junction to case	At 180° sine: double side cooled Clamping force 15.0kN					0.035	°C /W
$R_{th(c-h)}$	Thermal resistance case to heat sink					0.008		
F_m	Mounting force				10		20	kN
T_{stg}	Stored temperature				-40		190	°C
W_t	Weight					240		g
Outline	ZT33cT							

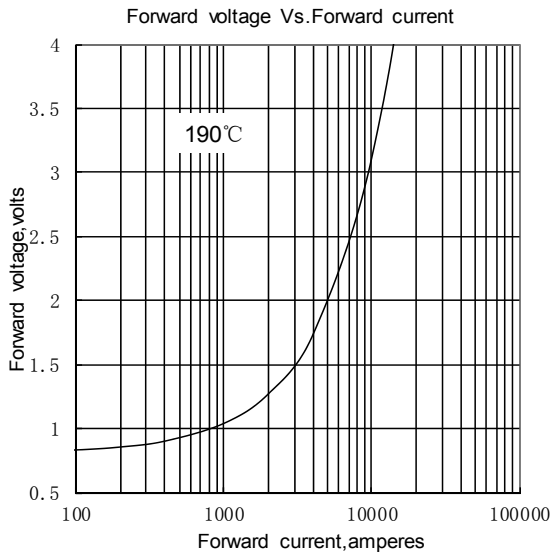


Fig.1

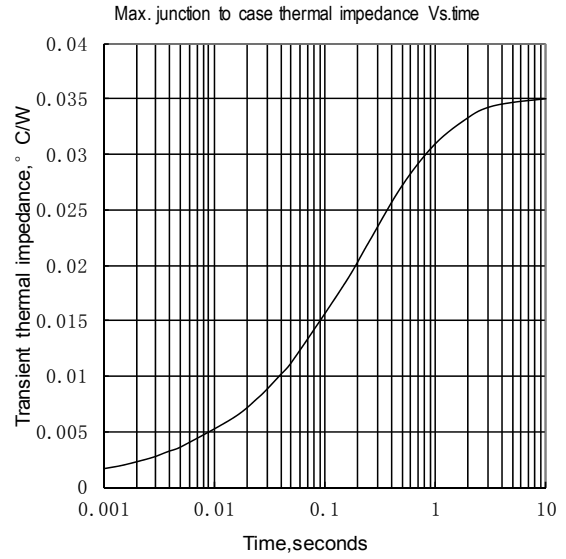


Fig.2

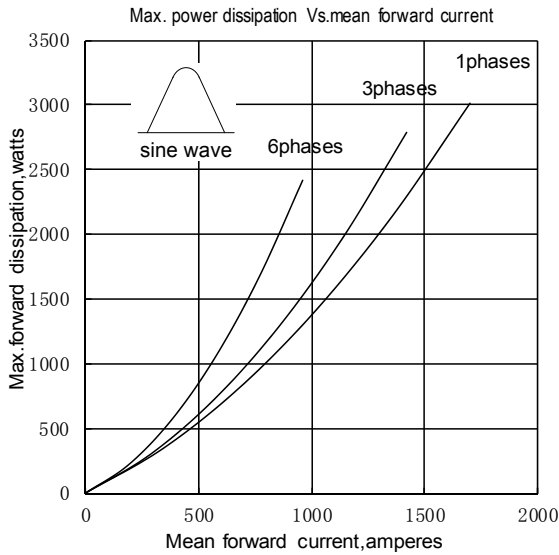


Fig.3

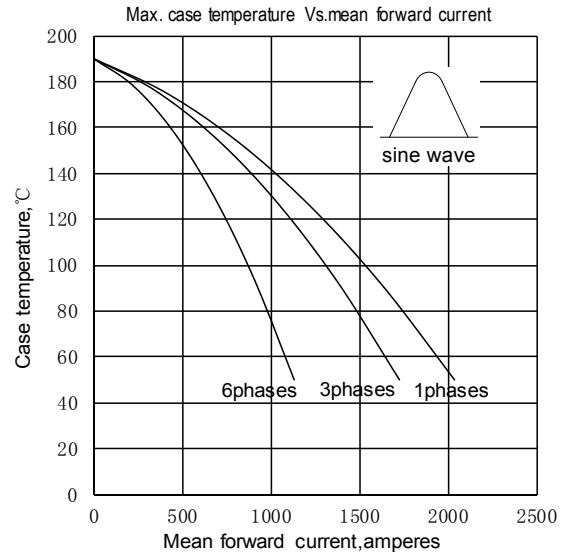


Fig.4

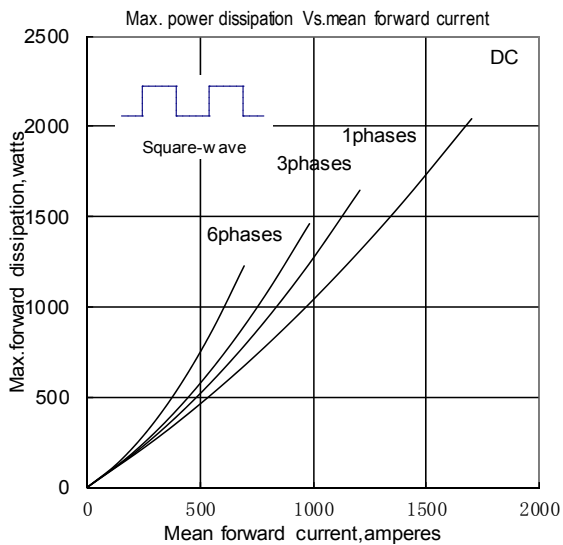


Fig.5

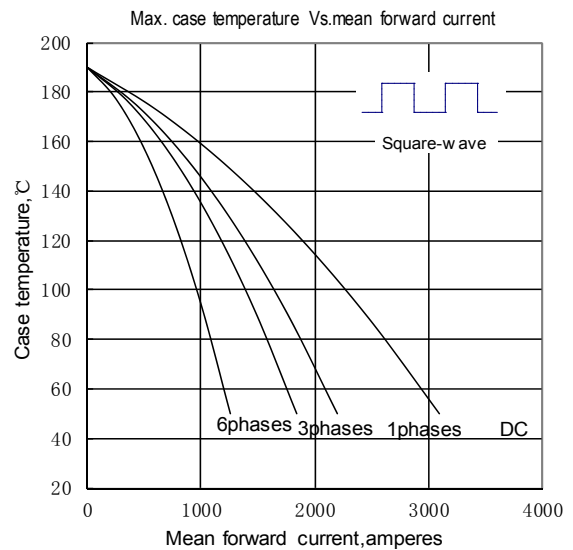


Fig.6

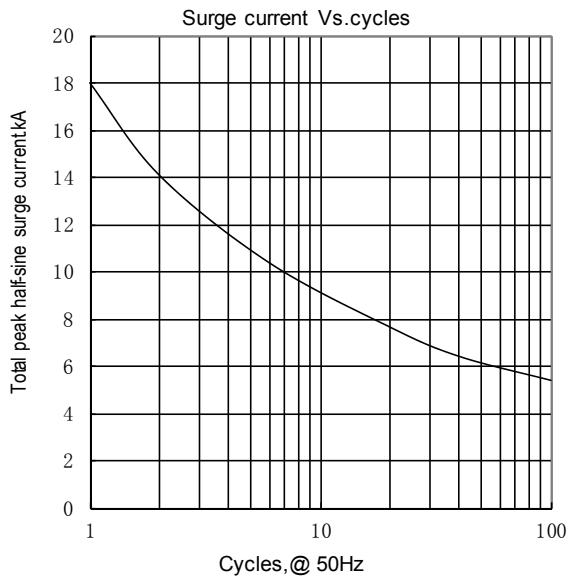


Fig.7

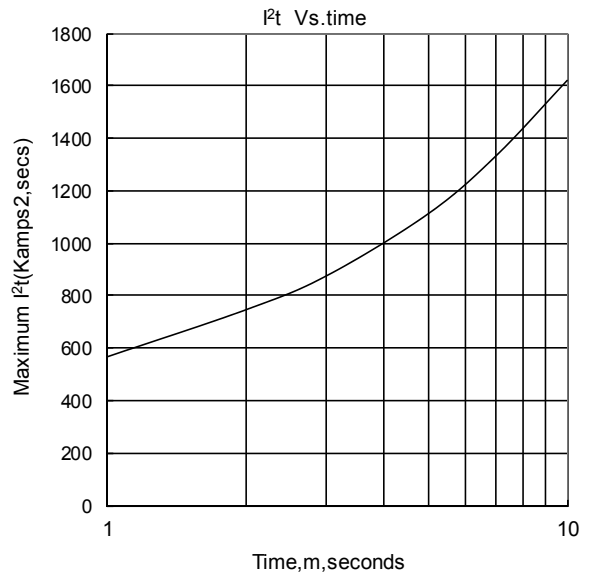


Fig.8

Outline:

