

**Features:**

- Center amplifying gate
- Metal case with ceramic insulator
- Low on-state and switching losses

**Typical Applications**

- AC controllers
- DC and AC motor control
- Controlled rectifiers

**Part No. H76KPN-KT60dT**

$I_{T(AV)}$	1800A
$V_{DRM}, V_{RRM}$	4600V 5000V
	5200V 5500V

SYMBOL	CHARACTERISTIC	TEST CONDITIONS	$T_j(^{\circ}\text{C})$	VALUE			UNIT
				Min	Type	Max	
$I_{T(AV)}$	Mean on-state current	180° half sine wave 50Hz Double side cooled, $T_c=70^{\circ}\text{C}$	125			1800	A
$V_{DRM}$ $V_{RRM}$	Repetitive peak off-state voltage Repetitive peak reverse voltage	tp=10ms	125	4500		5500	V
$I_{DRM}$ $I_{RRM}$	Repetitive peak current	at $V_{DRM}$ at $V_{RRM}$	125			350	mA
$I_{TSM}$	Surge on-state current	10ms half sine wave	125			22	kA
$I^2t$	$I^2t$ for fusing coordination	$V_R=0.6V_{RRM}$				2420	$\text{A}^2\text{s} \times 10^3$
$V_{TO}$	Threshold voltage		125			1.01	V
$r_T$	On-state slope resistance					0.36	$\text{m}\Omega$
$V_{TM}$	Peak on-state voltage	$I_{TM}=3000\text{A}, F=40\text{kN}$	25			2.20	V
$dv/dt$	Critical rate of rise of off-state voltage	$V_{DM}=0.67V_{DRM}$	125			2000	$\text{V}/\mu\text{s}$
$di/dt$	Critical rate of rise of on-state current	$V_{DM}=67\%V_{DRM}$ to 3000A, Gate pulse $t_r \leq 0.5\mu\text{s}$ $IGM=1.5\text{A}$	125			200	$\text{A}/\mu\text{s}$
$Q_{rr}$	Recovery charge	$I_{TM}=2000\text{A}, tp=4000\mu\text{s}, di/dt=-5\text{A}/\mu\text{s},$ $V_R=100\text{V}$	125		3500		$\mu\text{C}$
$I_{GT}$	Gate trigger current	VA=12V, IA=1A	25	40		300	mA
$V_{GT}$	Gate trigger voltage			0.8		3.0	V
$I_H$	Holding current			25		200	mA
$I_L$	Latching current					1000	mA
$V_{GD}$	Non-trigger gate voltage	$V_{DM}=67\%V_{DRM}$	125			0.3	V
$R_{th(j-C)}$	Thermal resistance Junction to case	At 180° sine double side cooled Clamping force 40.0kN				0.011	$^{\circ}\text{C}/\text{W}$
$R_{th(c-h)}$	Thermal resistance case to heatsink					0.003	$^{\circ}\text{C}/\text{W}$
$F_m$	Mounting force			35	40	47	kN
$T_{vj}$	Junction temperature			-40		125	$^{\circ}\text{C}$
$T_{stg}$	Stored temperature			-40		140	$^{\circ}\text{C}$
$W_t$	Weight				1140		g
Outline		KT60dT					

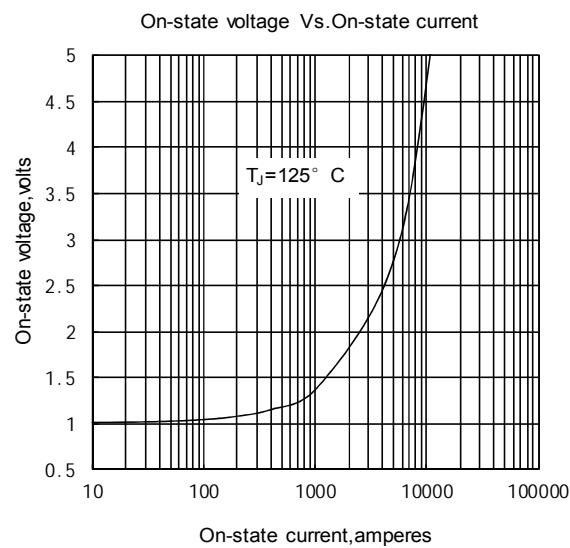


Fig.1

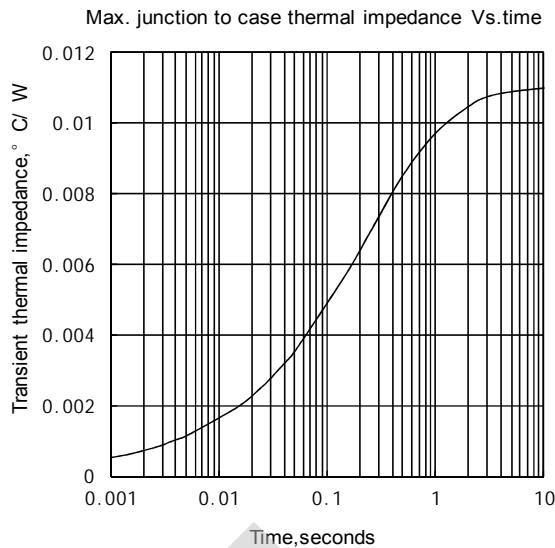


Fig.2

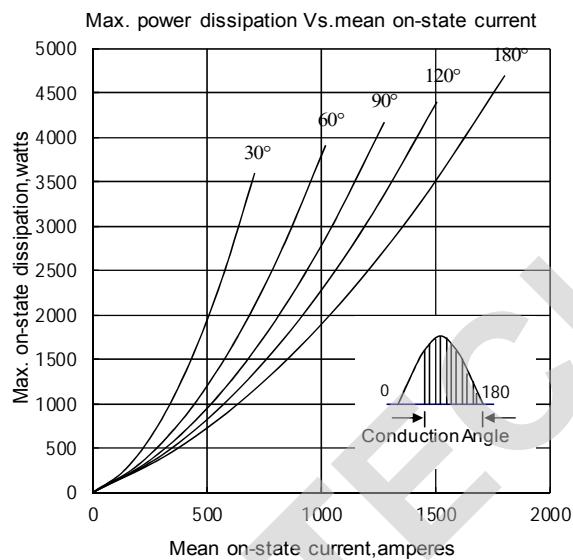


Fig.3

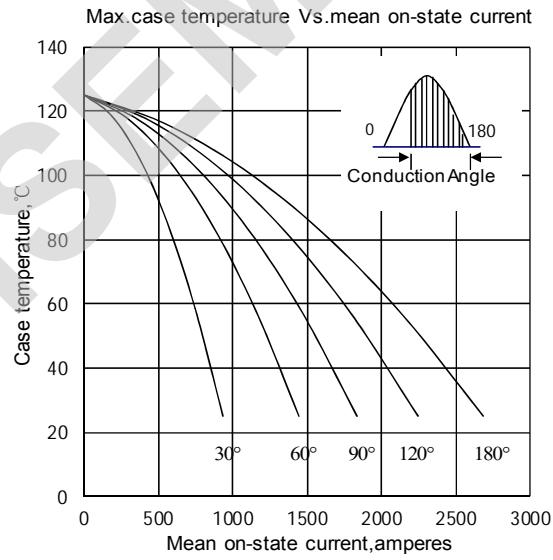


Fig.4

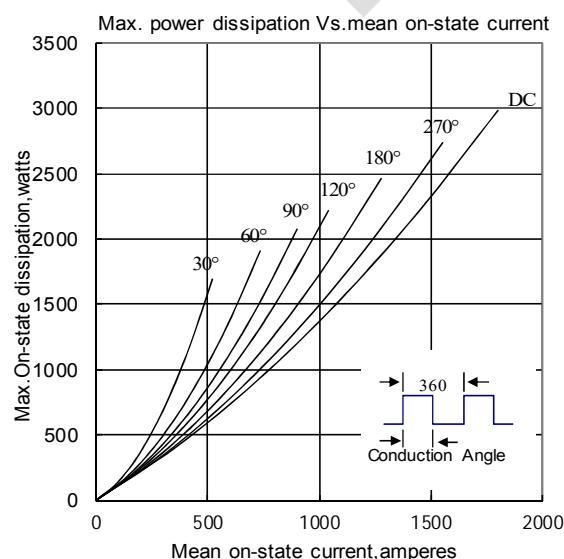


Fig.5

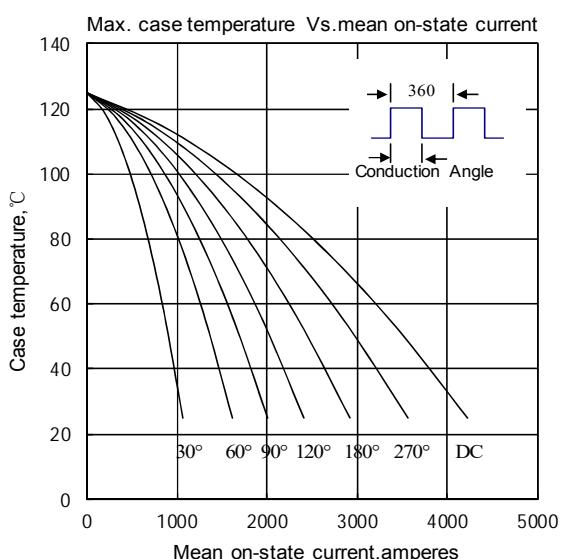


Fig.6

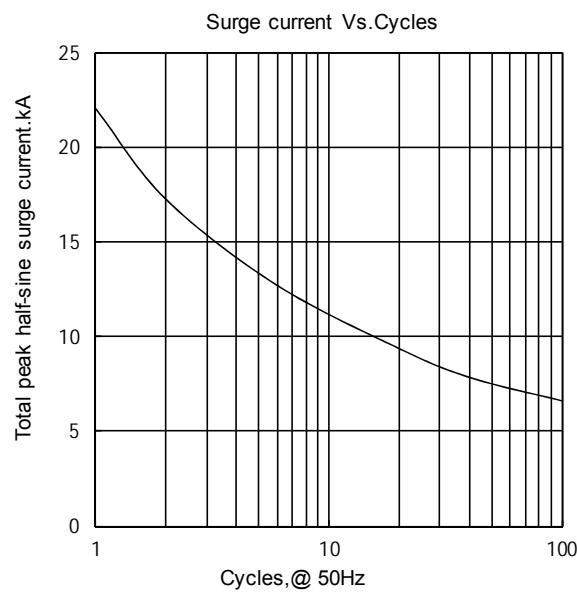


Fig.7

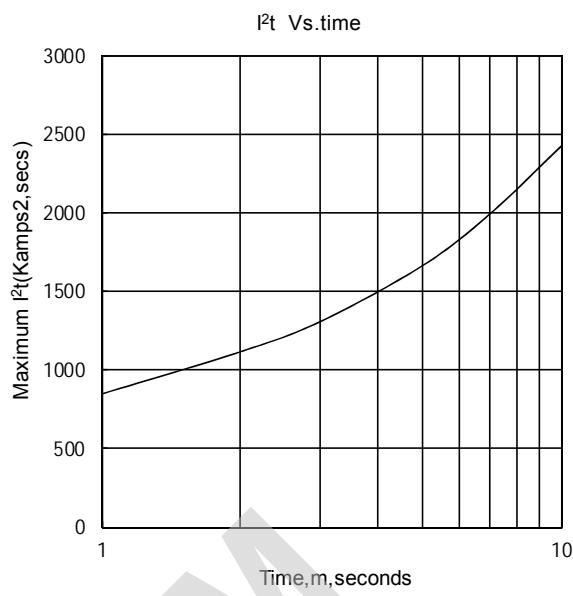


Fig.8

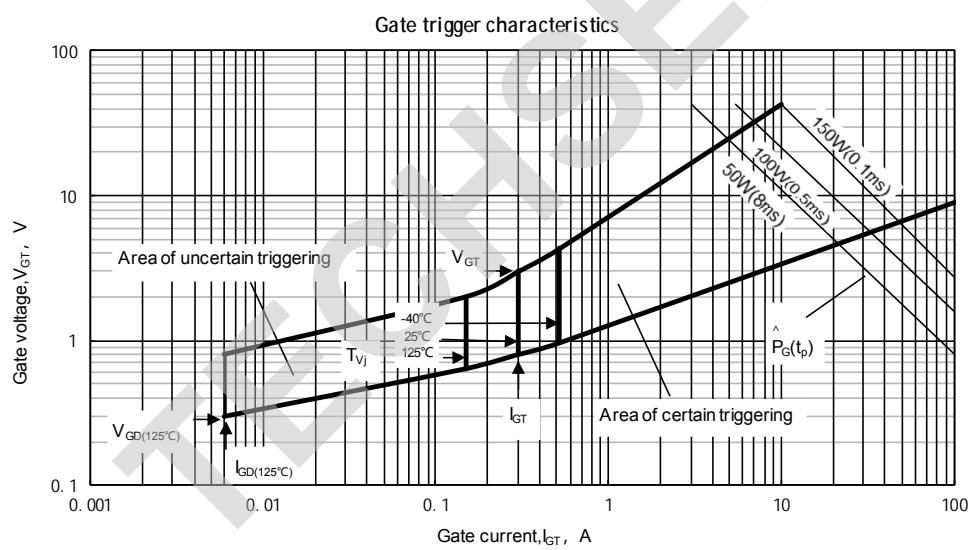
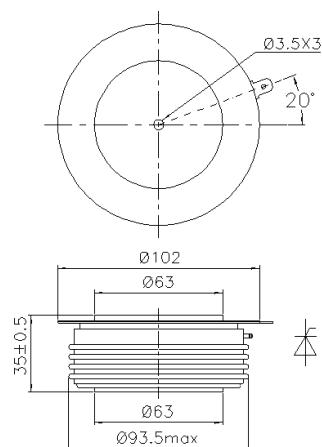


Fig.9

**Outline:**

TECHSEM reserves the right to change specifications without notice.