

**Features:**

- Isolated mounting base 3000V~
- Pressure contact technology with Increased power cycling capability
- Space and weight saving

**Typical Applications:**

- AC/DC Motor drives
- Various rectifiers
- DC supply for PWM inverter

$V_{RRM}, V_{DRM}$	Type & Outline		
2000V	MTx350-20-415F3	MFx350-20-415F3	
2200V	MTx350-22-415F3	MFx350-22-415F3	
2500V	MTx350-25-415F3	MFx350-25-415F3	
2500V	MT350-25-415F3G		

MTx stands for any type of **MTC**, **MTA**, **MTK**MFx stands for any type of **MFC**, **MFA**, **MFK**

SYMBOL	CHARACTERISTIC	TEST CONDITIONS	$T_i$ (°C)	VALUE			UNIT
				Min	Type	Max	
$I_{T(AV)}$	Mean on-state current	180° half sine wave 50Hz Single side cooled, $T_c=85^\circ\text{C}$	125			350	A
$I_{T(RMS)}$	RMS on-state current					549	A
$I_{DRM}$ $I_{RRM}$	Repetitive peak current	at $V_{DRM}$ at $V_{RRM}$	125			40	mA
$I_{TSM}$	Surge on-state current	$V_R=60\%V_{RRM}$ , $t=10\text{ms}$ half sine	125			10	kA
$I^2t$	$I^2t$ for fusing coordination		125			500	$10^3\text{A}^2\text{s}$
$V_{TO}$	Threshold voltage		125			0.84	V
$r_T$	On-state slope resistance					0.60	$\text{m}\Omega$
$V_{TM}$	Peak on-state voltage	$I_{TM}=1050\text{A}$	25			1.89	V
$dv/dt$	Critical rate of rise of off-state voltage	$V_{DM}=67\%V_{DRM}$	125			1000	$\text{V}/\mu\text{s}$
$di/dt$	Critical rate of rise of on-state current	Gate source 1.5A $t_r \leq 0.5\mu\text{s}$ Repetitive	125			200	$\text{A}/\mu\text{s}$
$I_{GT}$	Gate trigger current	$V_A=12\text{V}$ , $I_A=1\text{A}$	25	30		200	mA
$V_{GT}$	Gate trigger voltage			0.7		2.5	V
$I_H$	Holding current			10		200	mA
$I_L$	Latching current					1000	mA
$V_{GD}$	Non-trigger gate voltage	$V_{DM}=67\%V_{DRM}$	125			0.20	V
$R_{th(j-c)}$	Thermal resistance Junction to case	Single side cooled per chip				0.085	$^\circ\text{C}/\text{W}$
$R_{th(c-h)}$	Thermal resistance case to heatsink	Single side cooled per chip				0.040	$^\circ\text{C}/\text{W}$
$V_{iso}$	Isolation voltage	50Hz, R.M.S, $t=1\text{min}$ , $I_{iso}=1\text{mA}(\text{MAX})$		3000			V
$F_m$	Terminal connection torque(M10)			10		12	$\text{N}\cdot\text{m}$
	Mounting torque(M6)			4.5		6	$\text{N}\cdot\text{m}$
$T_{vj}$	Junction temperature			-40		125	$^\circ\text{C}$
$T_{stg}$	Stored temperature			-40		125	$^\circ\text{C}$
$W_t$	Weight				1260		g
Outline		415F3					

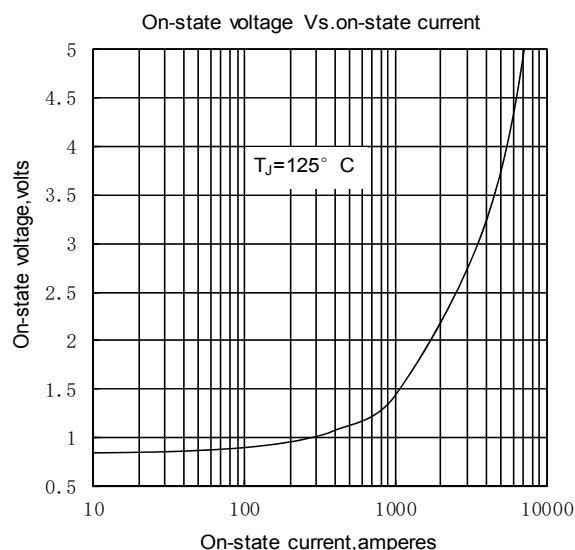


Fig.1

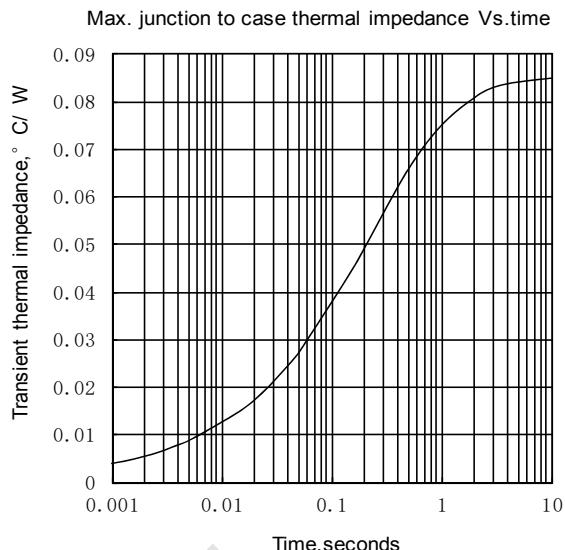


Fig.2

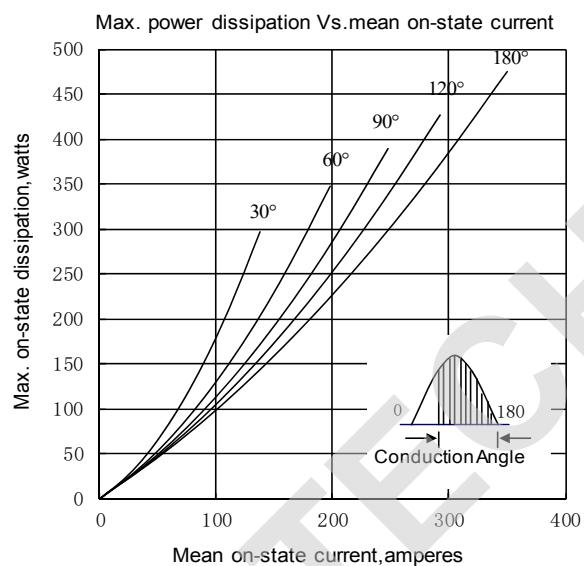


Fig.3

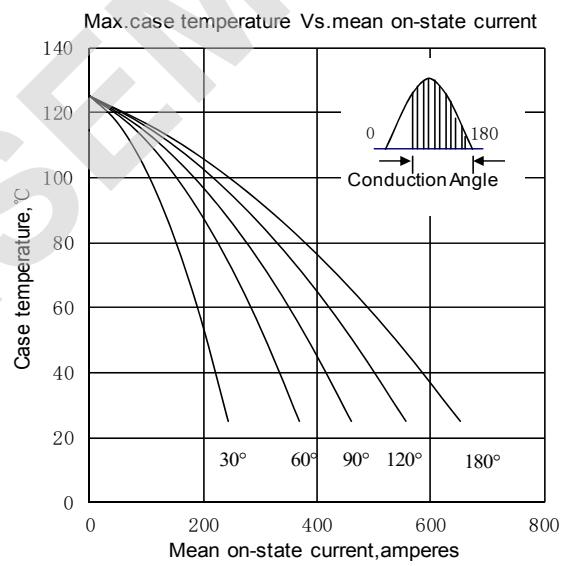


Fig.4

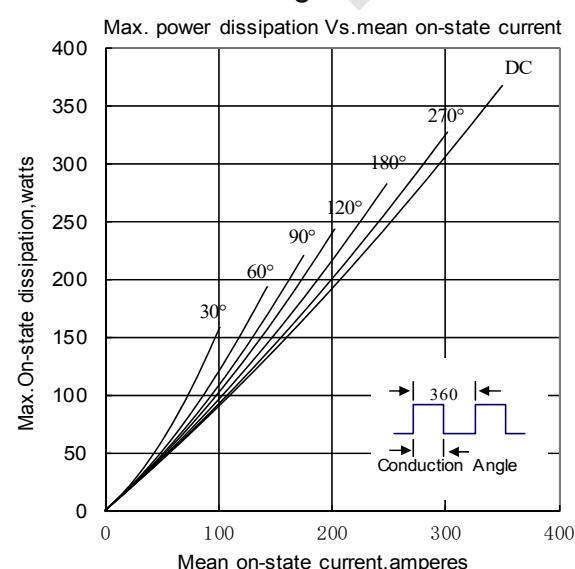


Fig.5

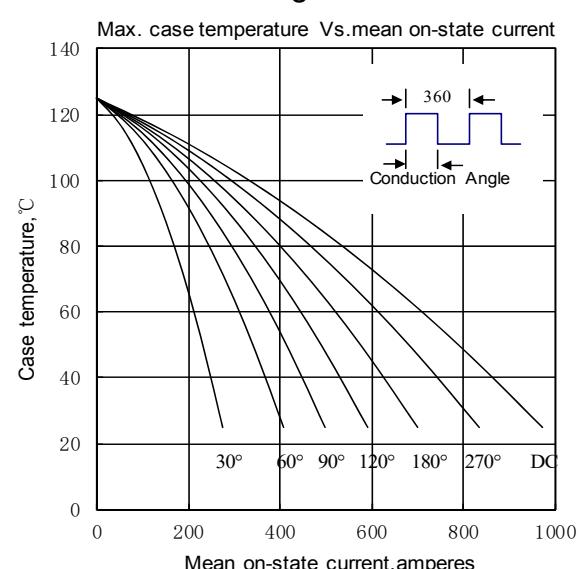


Fig.6

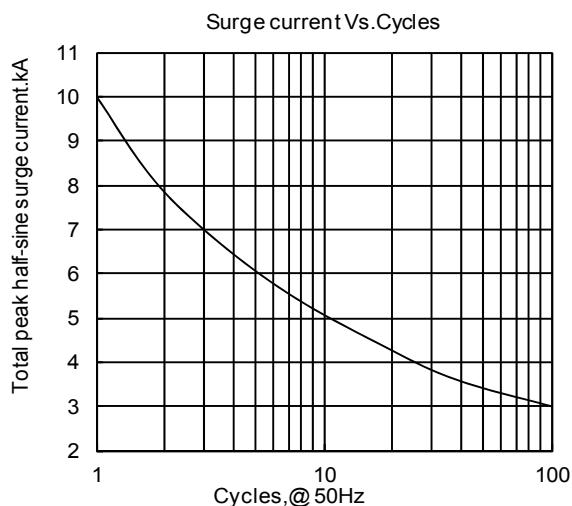


Fig. 7

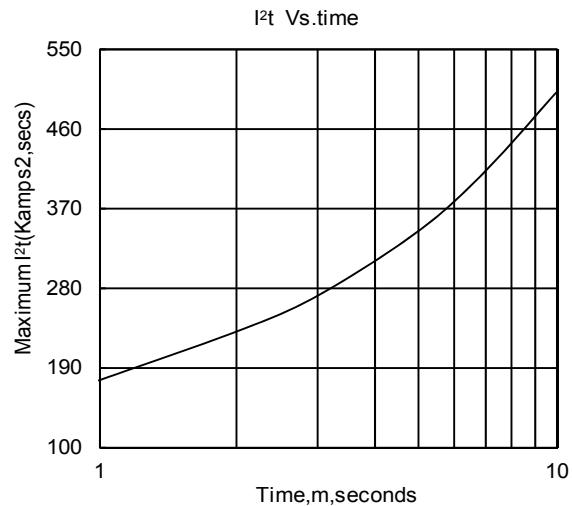


Fig. 8

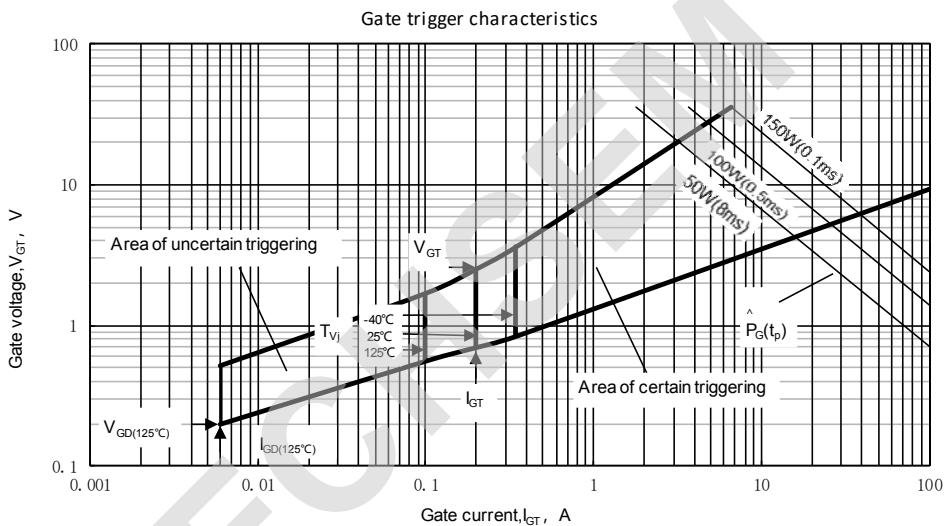
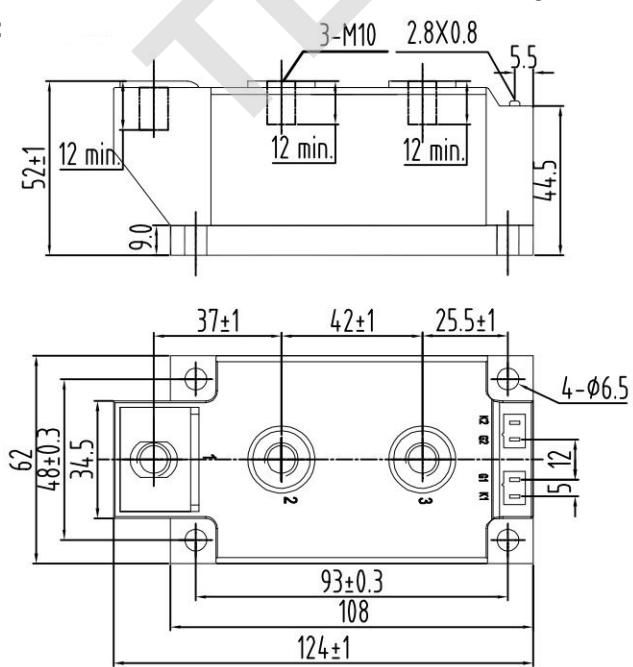


Fig.9

**Outline:****Unmarked dimensional tolerance: ±0.5mm**