

**Features:**

- Isolated mounting base 2500V~
- Solder joint technology with Increased power cycling capability
- Space and weight saving

**Typical Applications:**

- Inverter
- Inductive heating
- Chopper

V <sub>RRM</sub>	Type & Outline		
	600V	800V	1000V
1200V	MDS50-06-232H5	MDS50-08-232H5	MDS50-10-232H5
1400V	MDS50-12-232H5	MDS50-14-232H5	MDS50-16-232H5
1600V	MDS50-18-232H5		
1800V			

SYMBOL	CHARACTERISTIC	TEST CONDITIONS	T <sub>j</sub> (°C)	VALUE			UNIT
				Min	Type	Max	
I <sub>O</sub>	DC output current	Three-phase full wave rectifying circuit, T <sub>C</sub> =100°C	150			50	A
I <sub>RRM</sub>	Repetitive peak current	at V <sub>RRM</sub>	150			8	mA
I <sub>FSM</sub>	Surge forward current	10ms half sine wave	150			0.4	kA
I <sup>2</sup> t	I <sup>2</sup> t for fusing coordination	V <sub>R</sub> =0				0.80	10 <sup>3</sup> A <sup>2</sup> s
V <sub>FO</sub>	Threshold voltage		150			0.7	V
r <sub>F</sub>	Forward slope resistance					6.0	m
V <sub>FM</sub>	Peak forward voltage	I <sub>FM</sub> =50A	25			1.20	V
R <sub>th(j-c)</sub>	Thermal resistance Junction to case	Single side cooled, per total				0.30	°C /W
R <sub>th(c-h)</sub>	Thermal resistance case to heatsink	Single side cooled, per total				0.07	°C /W
V <sub>iso</sub>	Isolation voltage	50Hz, R.M.S, t=1min, I <sub>iso</sub> :1mA(max)		2500			V
F <sub>m</sub>	Terminal connection torque(M5)			2.5		4.0	N·m
	Mounting torque(M5)			2.5		4.0	N·m
T <sub>vj</sub>	Junction temperature			-40		150	°C
T <sub>stg</sub>	Stored temperature			-40		125	°C
W <sub>t</sub>	Weight				135		g
Outline				232H5			

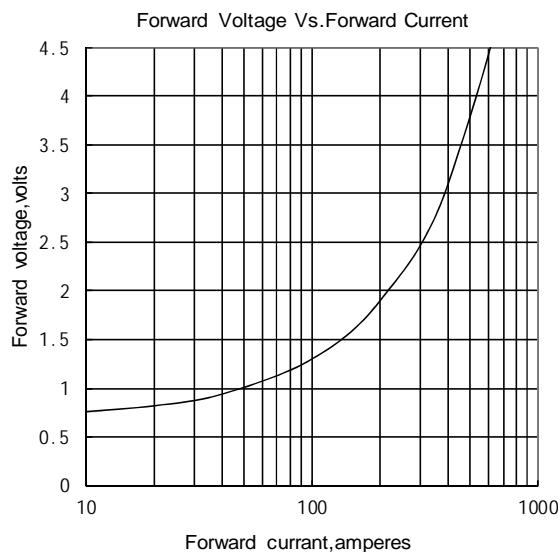


Fig.1

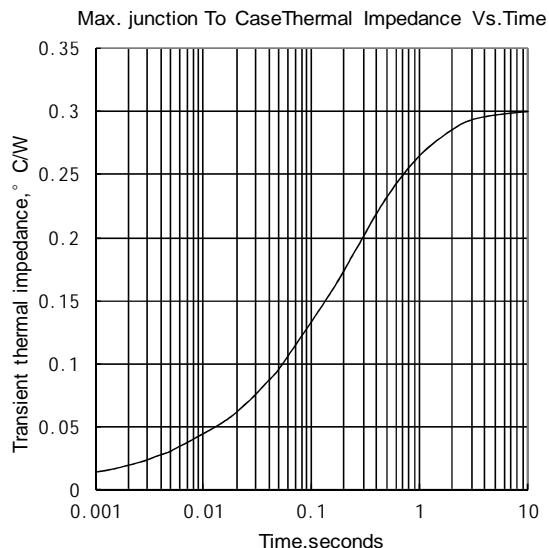


Fig.2

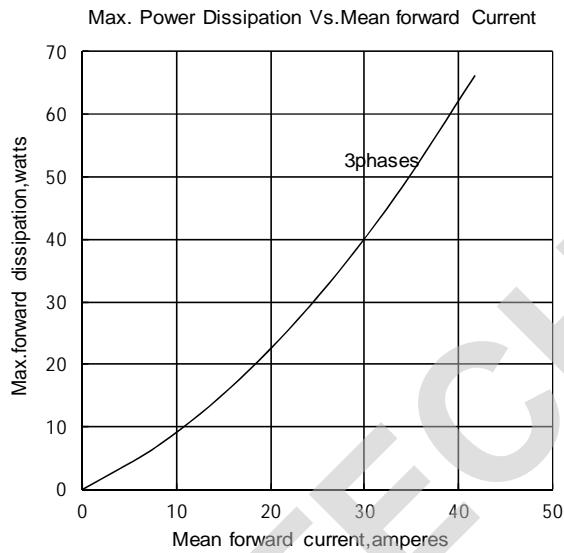


Fig.3

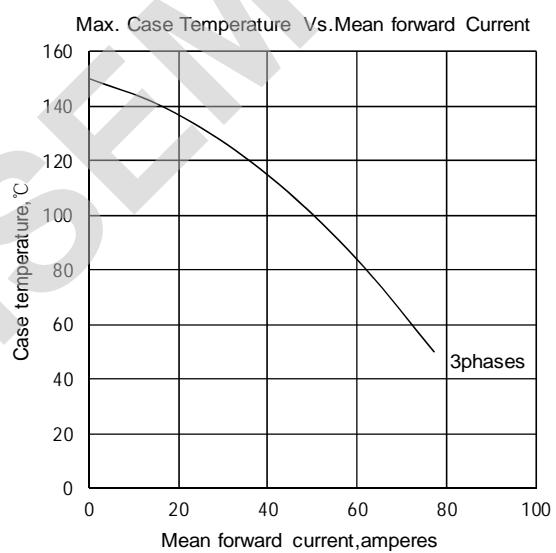


Fig.4

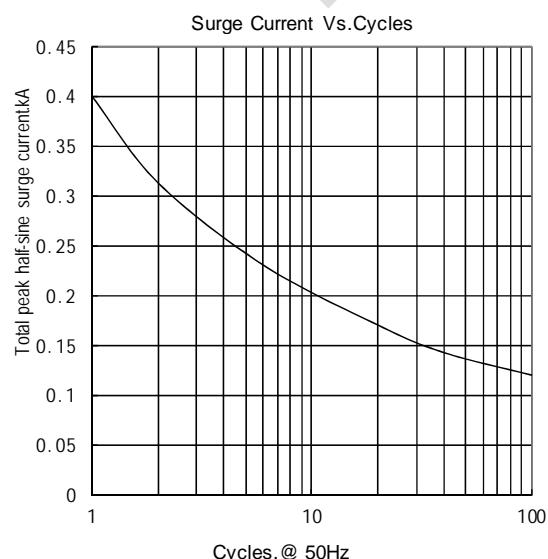


Fig.5

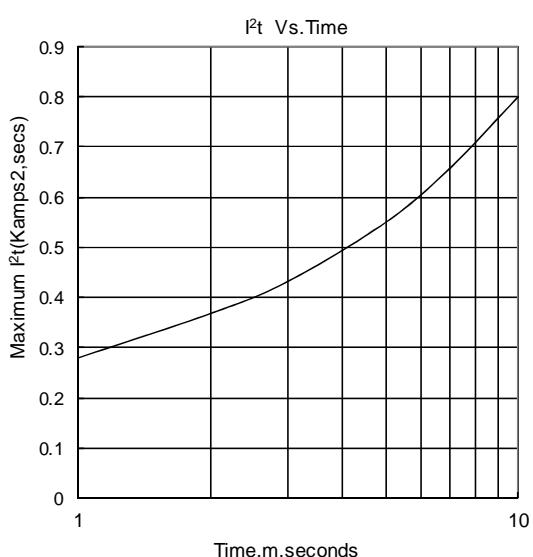
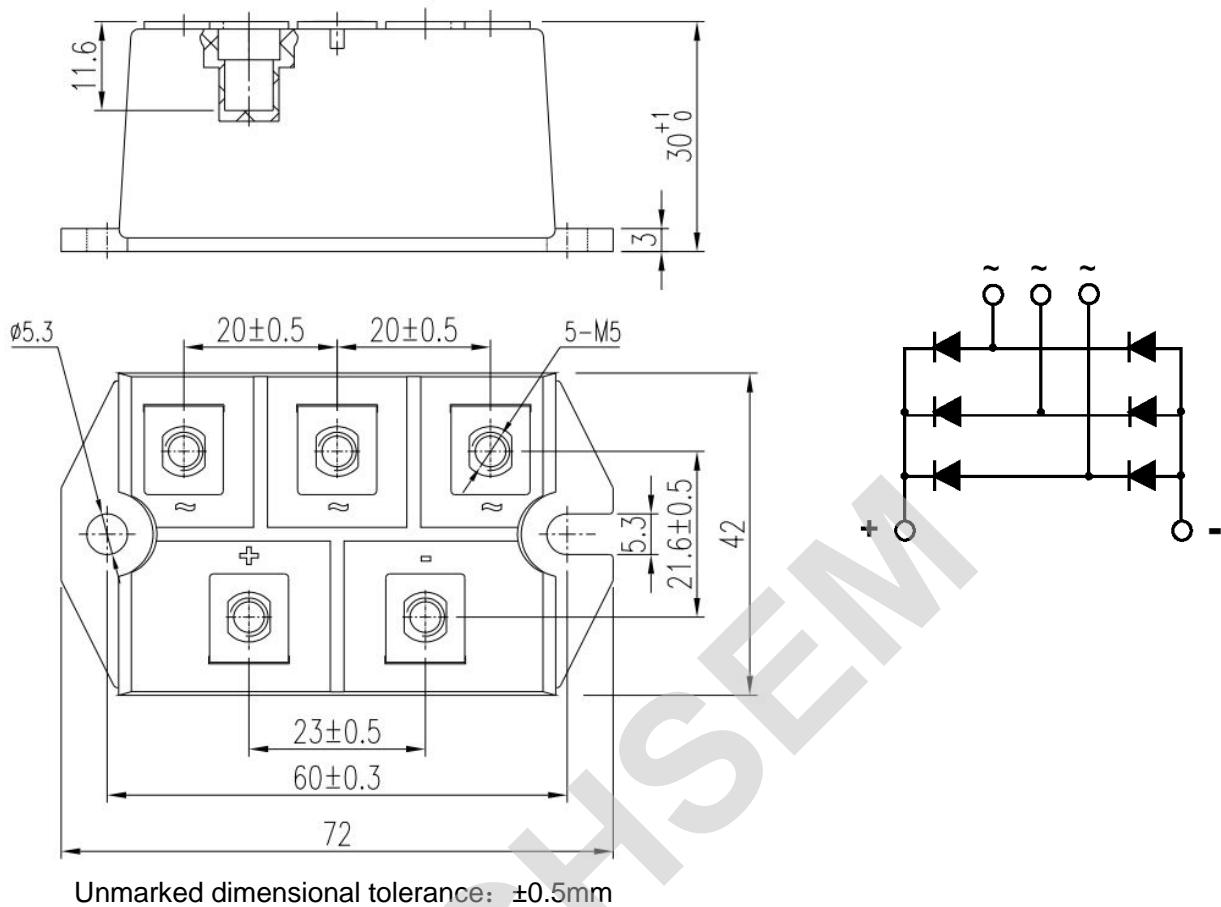


Fig.6

**Outline:**

Unmarked dimensional tolerance: ±0.5mm