


Features

- Low forward voltage drop
- Soft recovery
- Hermetic metal cases with ceramic insulators

Typical Applications

- Inverters and choppers
- Motor control
- Snubber and free-wheeling diodes

$I_{F(AV)}$ **1650A**
 V_{RRM} **200~1000V**
 t_{rr} **4.0 μ s**

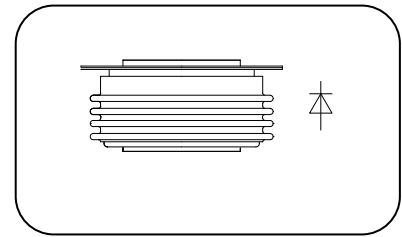

SYMBOL	CHARACTERISTIC	TEST CONDITIONS	T _J (°C)	VALUE			UNIT
				Min	Type	Max	
I _{F(AV)}	Mean forward current	180° half sine wave 50Hz Double side cooled,	150			2150	A
						1650	
						1600	
V _{RRM}	Repetitive peak reverse voltage	V _{RRM} tp=10ms V _{RSM} = V _{RRM} +100V	150	200		1000	V
I _{RRM}	Repetitive peak current	V _{RM} = V _{RRM}	150			80	mA
I _{FSM}	Surge forward current	10ms half sine wave	150			22	kA
I ² t	I ² T for fusing coordination	V _R =0.6V _{RRM}				2420	A ² s*10 ³
V _{FO}	Threshold voltage		150			1.15	V
r _F	Forward slop resistance					0.20	mΩ
V _{FM}	Peak on-state voltage	I _{TM} =3000A, F=24kN	25			1.8	V
I _{rm}	Reverse recovery current	I _{TM} =2000A, tp=1000 μ s, -di/dt=60A/ μ s, V _R =50V	100		63		A
t _{rr}	Reverse recovery time				4		μ s
Q _{rr}	Recovery charge				126	150	μ C
R _{th(j-c)}	Thermal resistance Junction to case	At 180° sine double side cooled Clamping force 24kN				0.020	°C/W
R _{th(c-h)}	Thermal resistance case to heat sink					0.005	
F _m	Mounting force			19		26	kN
T _{stg}	Stored temperature			-40		160	°C
W _t	Weight				440		g
Outline	ZT50cT						

Outline:

