**Features**

- Center amplifying gate
- Metal case with ceramic insulator
- Low on-state and switching losses

Typical Applications

- AC controllers
- DC and AC motor control
- Controlled rectifiers

Part No. Y89KPC-KT84dT

$I_{T(AV)}$	4900A
V_{DRM}, V_{RRM}	400V 600V
	800V 1000V

SYMBOL	CHARACTERISTIC	TEST CONDITIONS	$T_j(^{\circ}\text{C})$	VALUE			UNIT
				Min	Type	Max	
$I_{T(AV)}$	Mean on-state current	180° half sine wave 50Hz Double side cooled, $T_c=70^{\circ}\text{C}$				4900	
V_{DRM} V_{RRM}	Repetitive peak off-state voltage Repetitive peak reverse voltage	$t_p=10\text{ms}$	125	400		1000	V
I_{DRM} I_{RRM}	Repetitive peak current	at V_{DRM} at V_{RRM}	125			250	mA
I_{TSM}	Surge on-state current	10ms half sine wave	125			66	kA
I^2t	I^2t for fusing coordination	$V_R=0.6V_{RRM}$				21780	$\text{A}^2\text{s} \times 10^3$
V_{TO}	Threshold voltage		125			0.88	V
r_T	On-state slope resistance					0.06	$\text{m}\Omega$
V_{TM}	Peak on-state voltage	$I_{TM}=5000\text{A}, F=70\text{kN}$	25			1.80	V
dv/dt	Critical rate of rise of off-state voltage	$V_{DM}=0.67V_{DRM}$	125			1000	$\text{V}/\mu\text{s}$
di/dt	Critical rate of rise of on-state voltage current	$V_{DM}=67\%V_{DRM}$ to 4000A, Gate pulse $t_r \leq 0.5\mu\text{s}$ $I_{GM}=1.5\text{A}$	125			250	$\text{A}/\mu\text{s}$
Q_{rr}	Recovery charge	$I_{TM}=2000\text{A}, t_p=4000\mu\text{s}, di/dt=-20\text{A}/\mu\text{s}, V_R=100\text{V}$	125		3000		μC
I_{GT}	Gate trigger current			40		300	mA
V_{GT}	Gate trigger voltage			0.8		3.0	V
I_H	Holding current	$V_A=12\text{V}, I_A=1\text{A}$		20		300	mA
I_L	Latching current					1000	mA
V_{GD}	Non-trigger gate voltage	$V_{DM}=67\%V_{DRM}$	125			0.3	V
$R_{th(j-c)}$	Thermal resistance Junction to case	At 180° sine double side cooled Clamping force 70.0kN				0.007	$^{\circ}\text{C}/\text{W}$
$R_{th(c-h)}$	Thermal resistance case to heatsink					0.002	
F_m	Mounting force			63		84	kN
T_{vj}	Junction temperature			-40		125	$^{\circ}\text{C}$
t_g	Stored temperature			-40		140	$^{\circ}\text{C}$
W_t	Weight				1920		g
Outline	KT84dT						

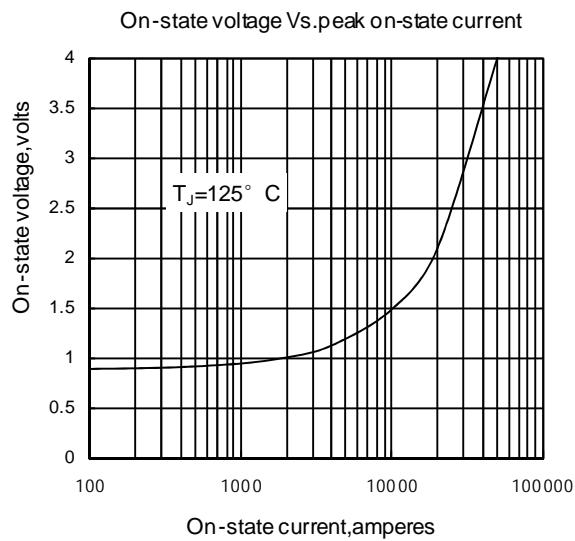


Fig1

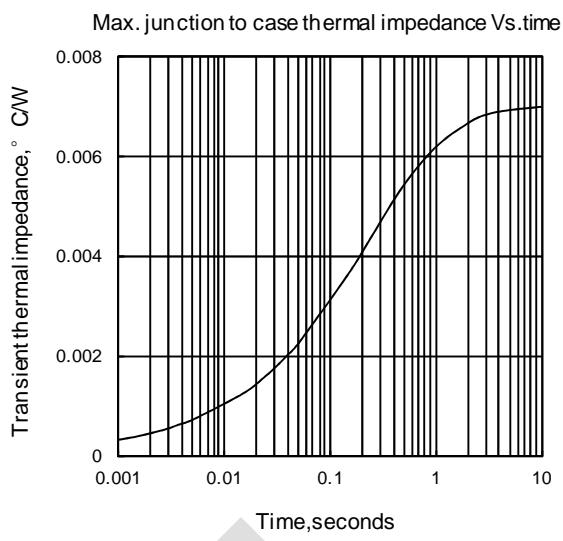


Fig2

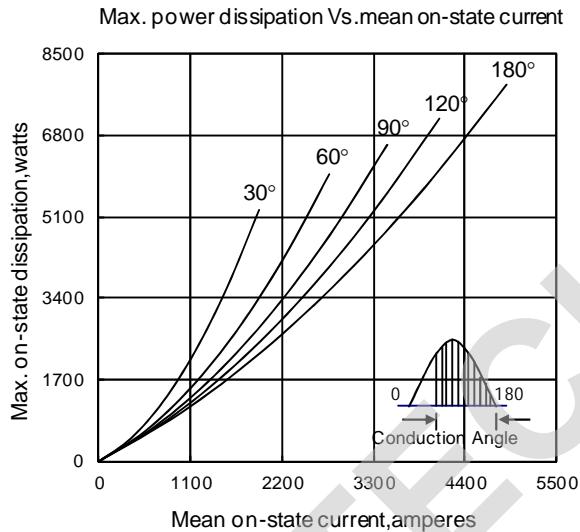


Fig3

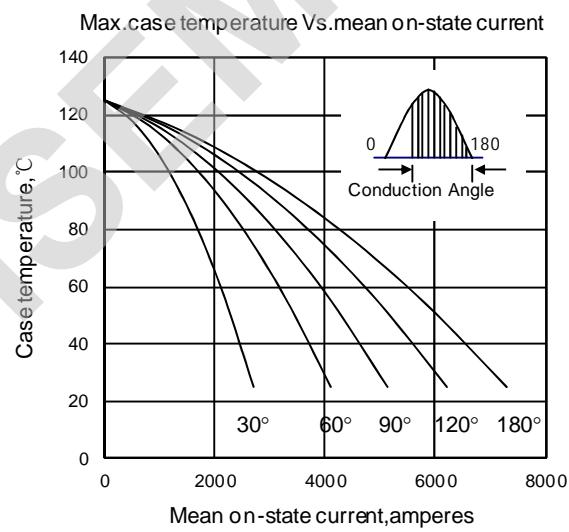


Fig4

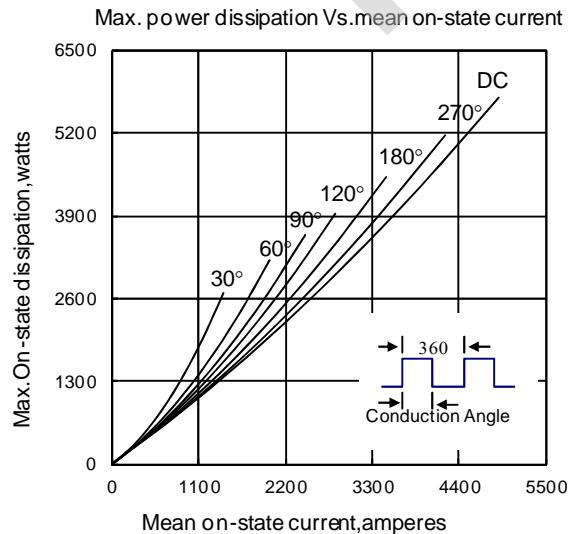


Fig5

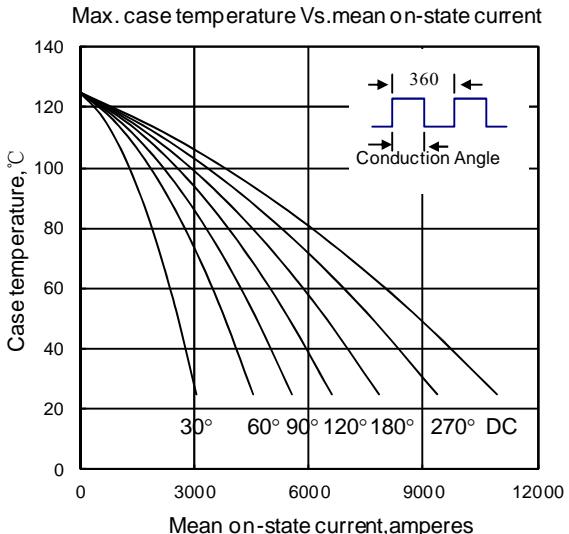


Fig6

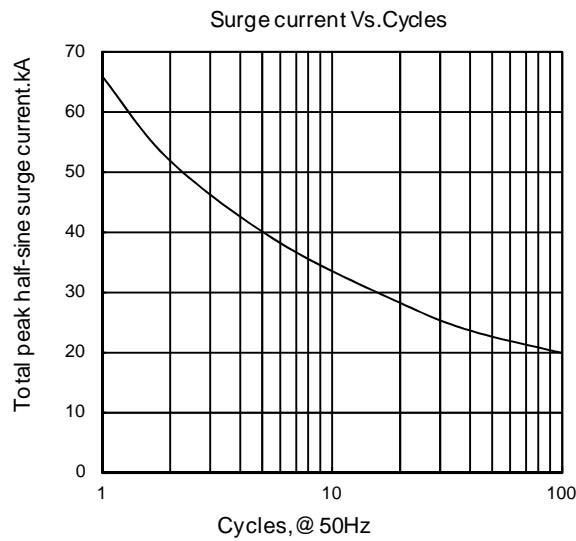


Fig 7

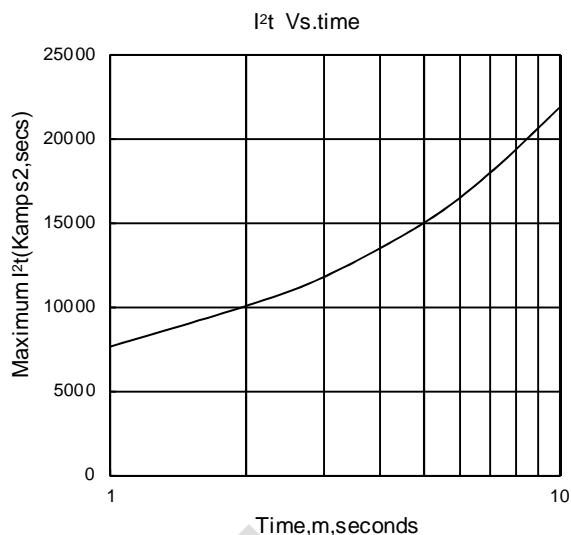


Fig 8

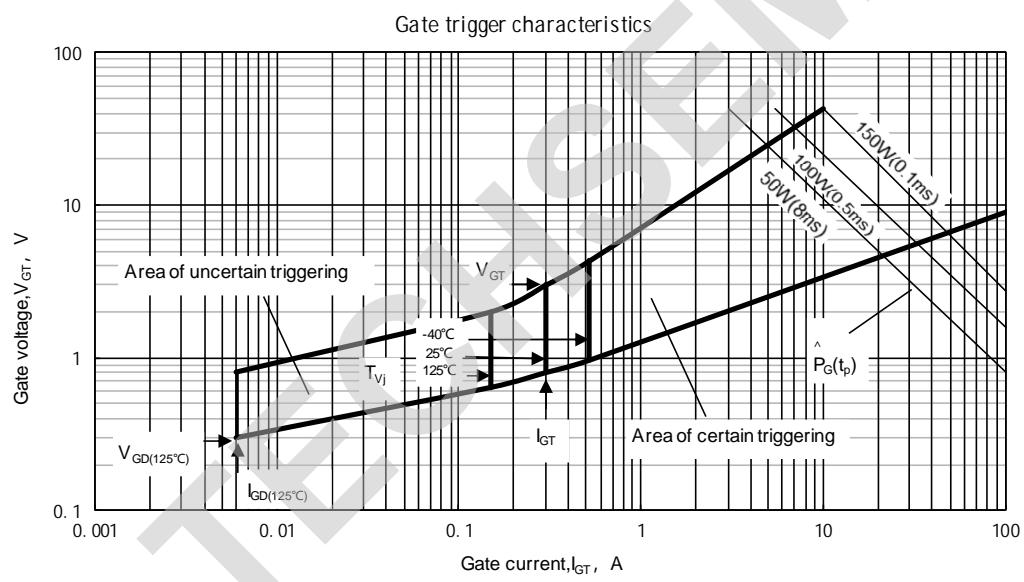
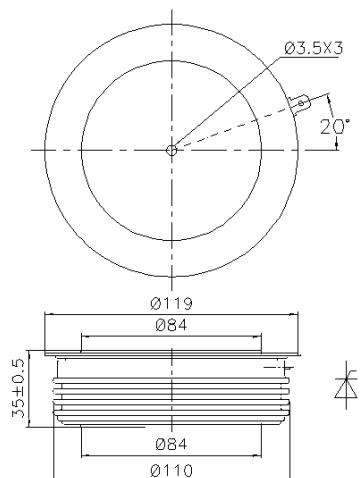


Fig.9

Outline:

TECHSEM reserves the right to change specifications without notice.